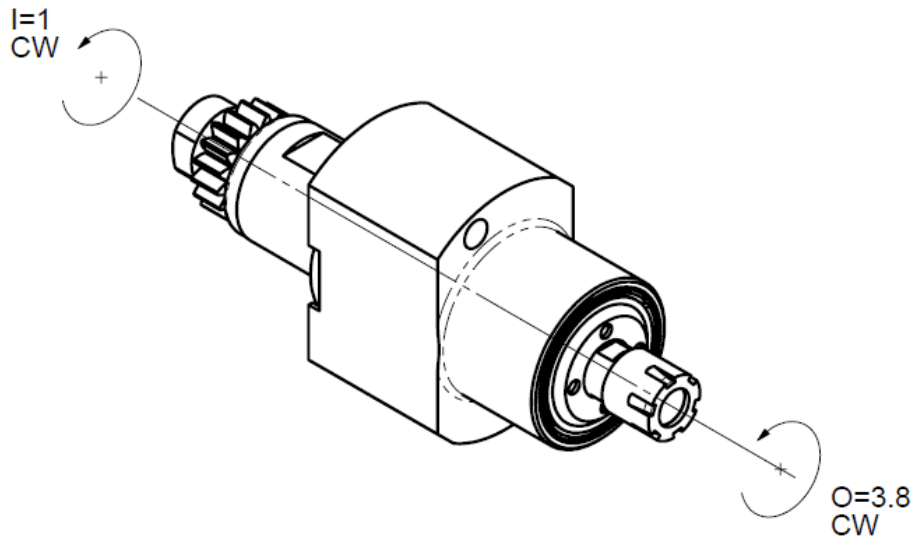

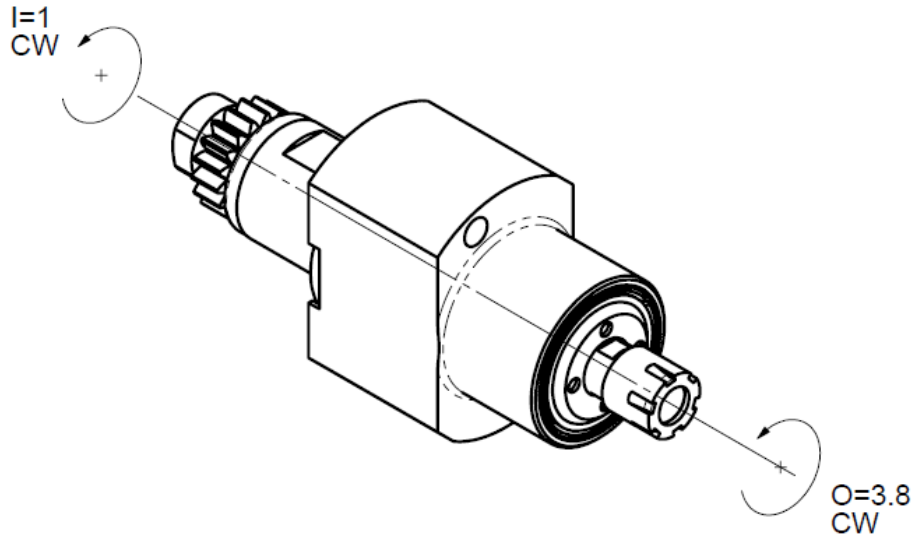

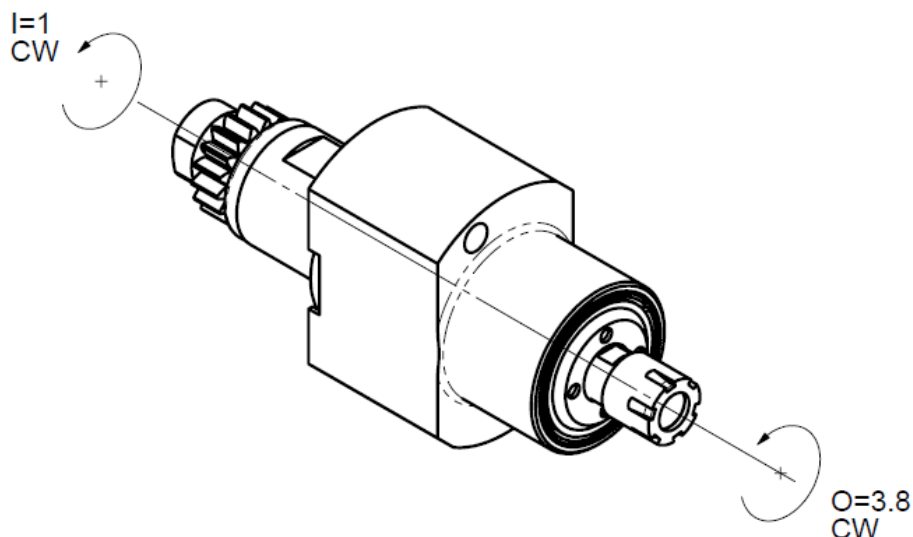


0200-SC008-A00A00-1S02


Machine:	STAR MICRONICS
Type:	SB12/20R , SR-20J/JN , SR 20R II , SR-20R III , SR-20R-IV SR-32J/JN , SR-32J II SW-12
Emplacement, N°:	Back tool post
Travail sur:	Broche de reprise
Type de travail:	
n_{max} :	30'400 [rpm]
i (n_i / n_o):	1 / 3.8
Attachement:	ER08
Infos:	
Couple max :	0.2 Nm


0200-SC008-A00A00-1S02

Machine:	STAR MICRONICS
Type:	SB12/20R , SR-20J/JN , SR 20R II , SR-20R III , SR-20R-IV SR-32J/JN , SR-32J II SW-12
Location, N°:	Back tool post
Work on:	Back spindle
Type of work:	
n_{max} :	30'400 [rpm]
i (n_i / n_o):	1 / 3.8
Attachement:	ER08
Infos:	
Torque max:	0.2 Nm

0200-SC008-A00A00-1S02

Maschine:	STAR MICRONICS
Typ:	SB12/20R , SR-20J/JN , SR 20R II , SR-20R III , SR-20R-IV SR-32J/JN , SR-32J II SW-12
Position, N°:	Back tool post
Arbeit über:	Abgreifspindel
Arbeitstyp:	
n _{max} :	30'400 [rpm]
i (n _i / n _o):	1 / 3.8
Befestigung:	ER08
Infos:	
Max. Drehmoment:	0.2 Nm

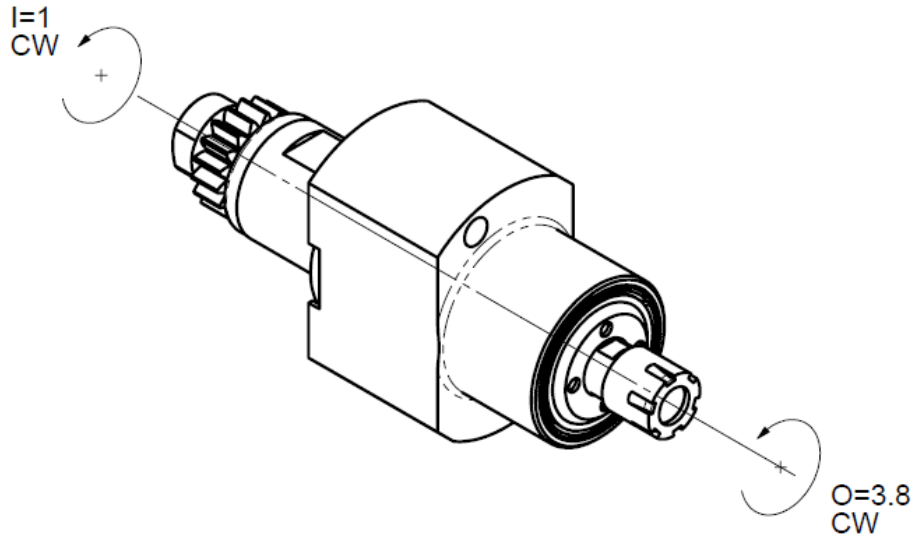0200-SC008-A00A00-1S02

Macchina:	STAR MICRONICS
Tipo:	SB12/20R , SR-20J/JN , SR 20R II , SR-20R III , SR-20R-IV SR-32J/JN , SR-32J II SW-12
Posizione, N°:	Back tool post
Lavoro al:	Contromandrino
Tipo di lavoro:	
n _{max} :	30'400 [rpm]
i (n _i / n _o):	1 / 3.8
Atacco:	ER08
Informazioni:	
Coppia max:	0.2 Nm