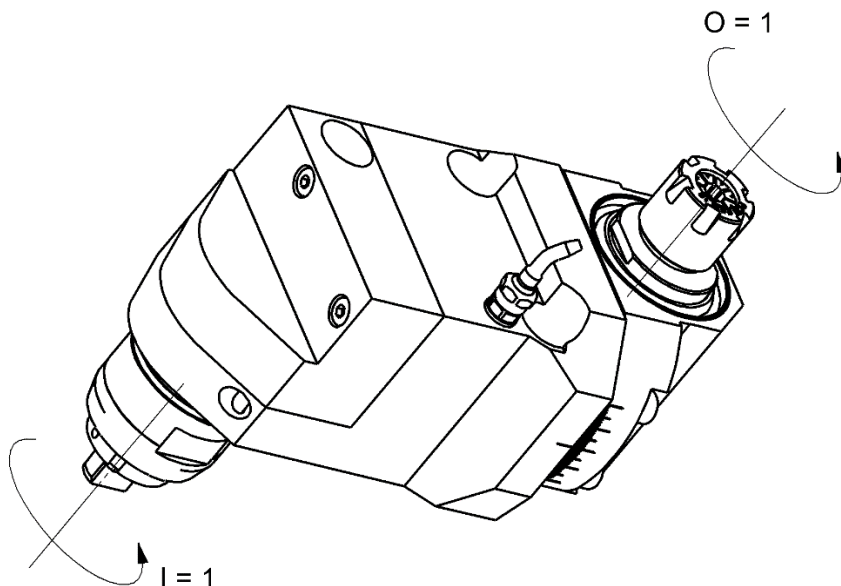


KSA2010- II

Machine: CITIZEN

Type: M32-5M5, M32-5M7, M32-5M8

Emplacement, N°: Turret

Travail sur: Broche principale

Type de travail:

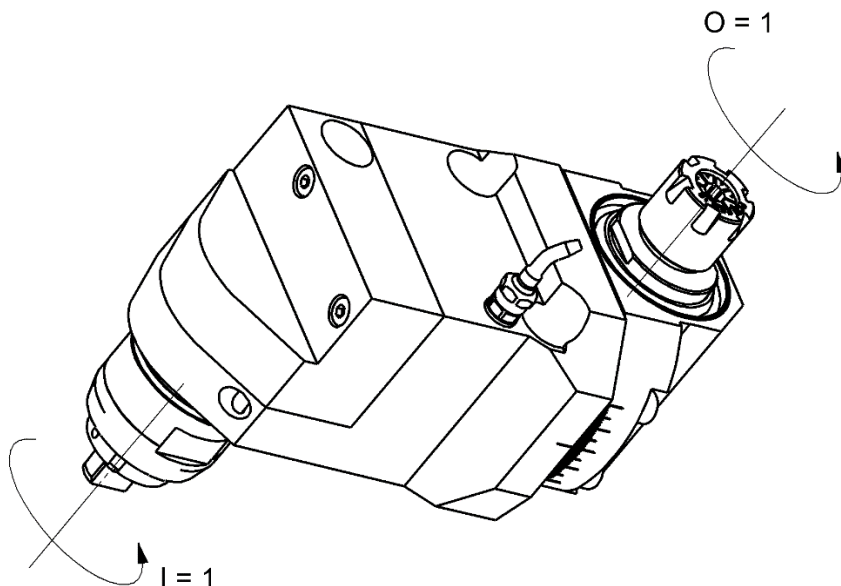
i (n_i / n_o): 13 / 16

Attachement: ER 16

Refroidissement externe Pression maximale :150 [bar]

Infos:

Réglage de l'angle : ± 20°

KSA2010- II

Machine: CITIZEN

Type: M32-5M5, M32-5M7, M32-5M8

Location, N°: Turret

Work on: Main spindle

Type of work:

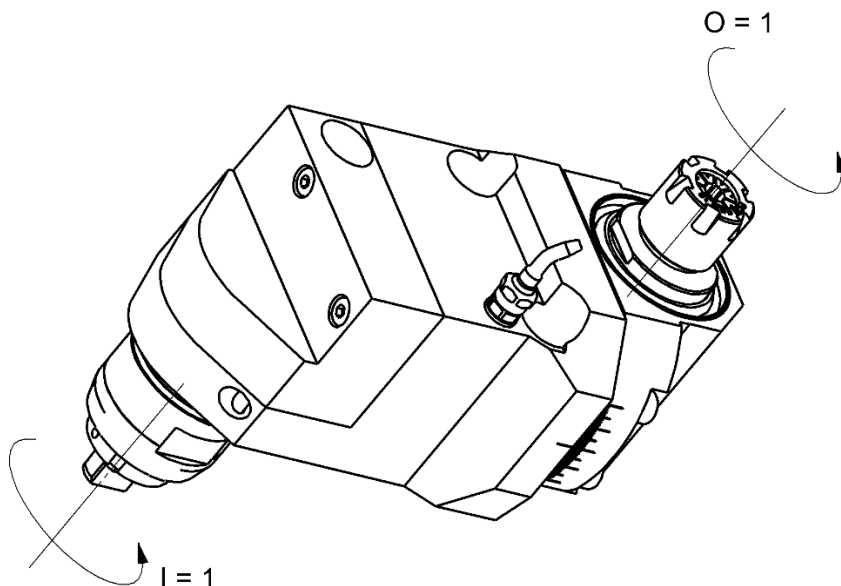
i (n_i / n_o): 13 / 16

Attachement: ER16

External coolant Maximum pressure: 150 [bar]

Infos:

Angle adjustment: ± 20°

KSA2010- II

Machine: CITIZEN

Typ: M32-5M5, M32-5M7, M32-5M8

Position, N°: Turret

Arbeit über: Hauptspindel

Arbeitstyp:

i (n_i / n_o): 13 / 16

Befestigung: ER16

Ausser Kühlmittel Maximaler Druck: 150 [bar]

Infos:

Winkeleinstellung: ± 20°