


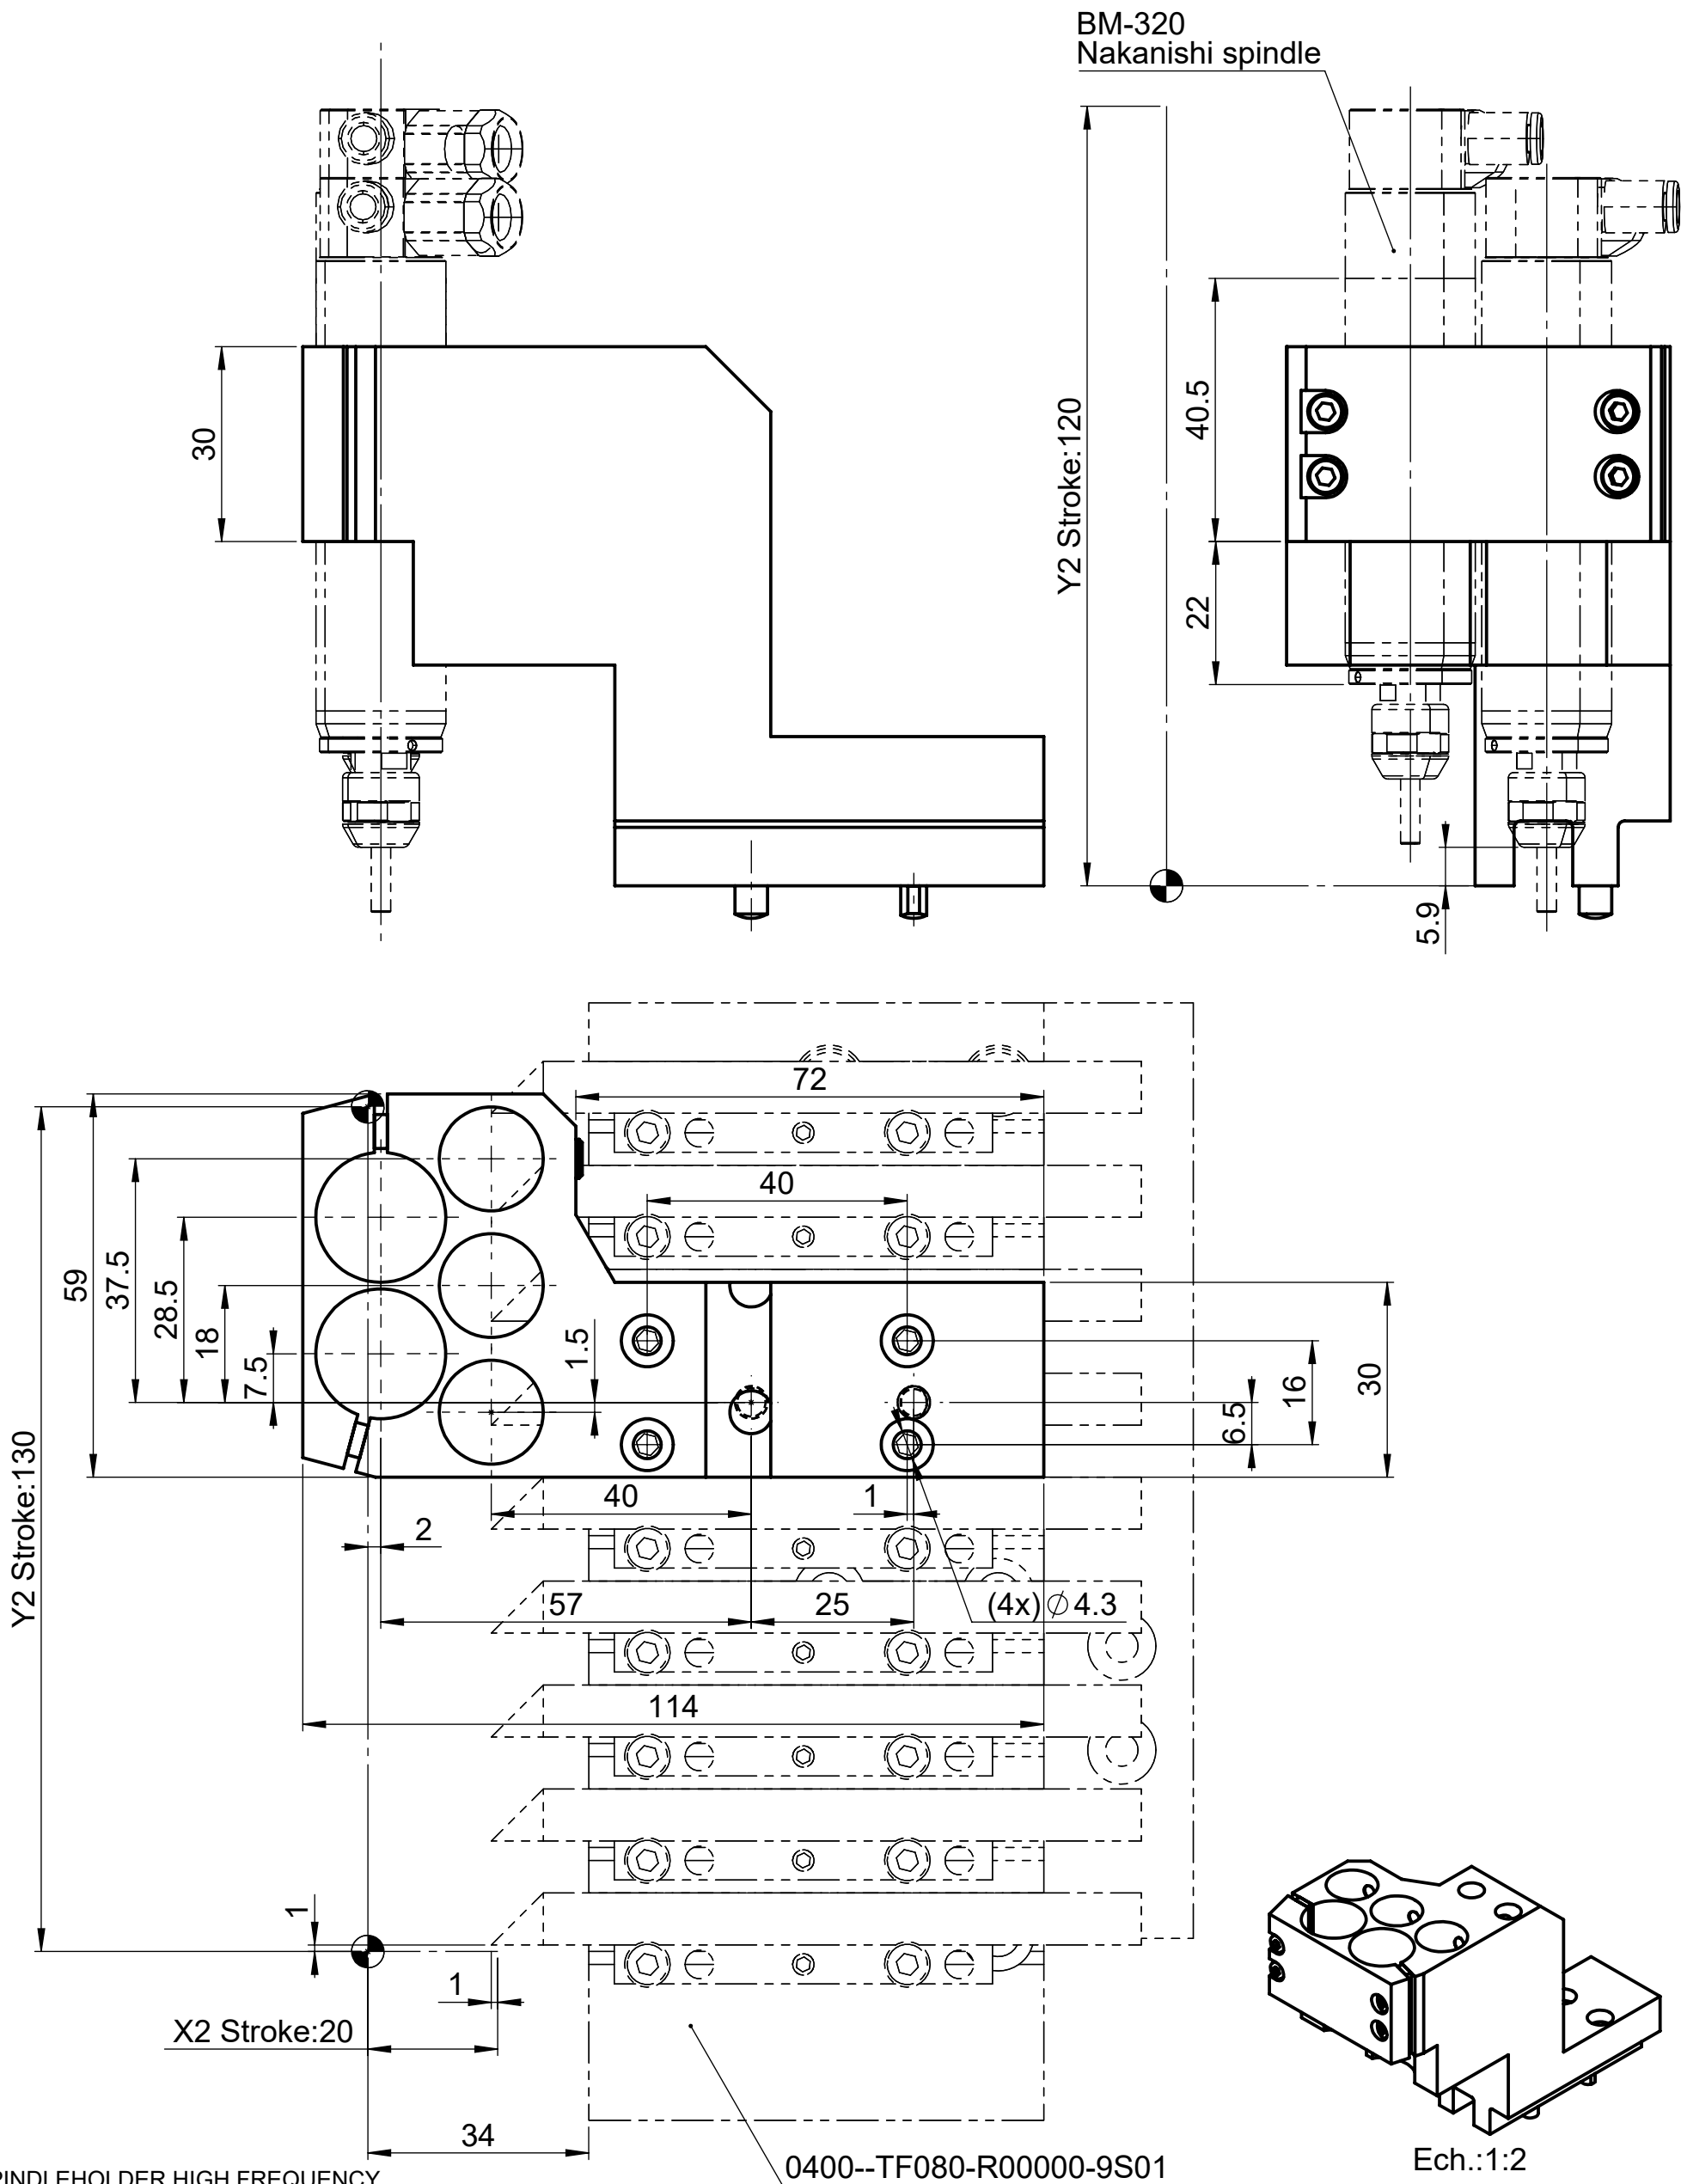

SPINDLEHOLDER HIGH FREQUENCY
POSITION :Front gang tool post, Back gang tool post
ATTACHMENT : 3x Ø16 mm (standard) + 2x Ø20 mm (HF-cylindrique)
COOLANT : No
MACHINE TYPES : TSUGAMI P036W, P056W

NOTES:
Please note the compatibility of the cutter carrier holder!
See "Table of boring bar holders Tsugami".

INCLUDED:
Fastening screw: 2x D912 M4x22 + 2x D912 M4x70

Porte-barre d'alésages 3xØ16 + 2xØ20	© The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design.	TSUGAMI			
		Echelle 1:1	Créé	Pilet	18.01.2024
			Validé	Borgeaud	19.01.2024
0400-HF200-R00000-5S01	Révision B	PCM be driven.		PCM Precision Tooling SA +41 21 967 33 66 CH-1844 Villeneuve www.pcm.ch	