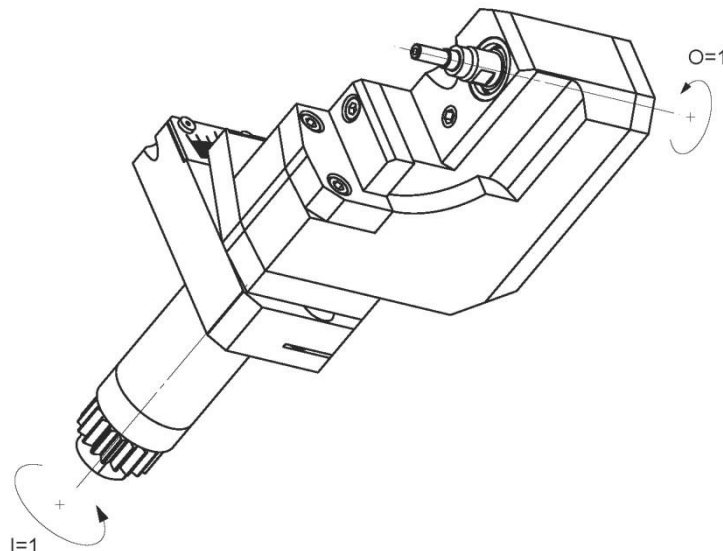


SB-GSH-145

Machine: STAR MICRONICS

Type: SB-12/16/20R SR-20J

Emplacement, N°: Coulisse linéaire / T33-34-35

Travail sur: Broche principale

Type de travail:


 $n_{\max}$: - [rpm] $i (n_i / n_o)$: 1 / 1

Attachement: Arbre Ø3.5/4.5mm

Sans refroidissement

Infos: Tête de taillage interchangeable (GSH-145, +15°/-3°) montée sur queue STAR2-PCR.

SB-GSH-145

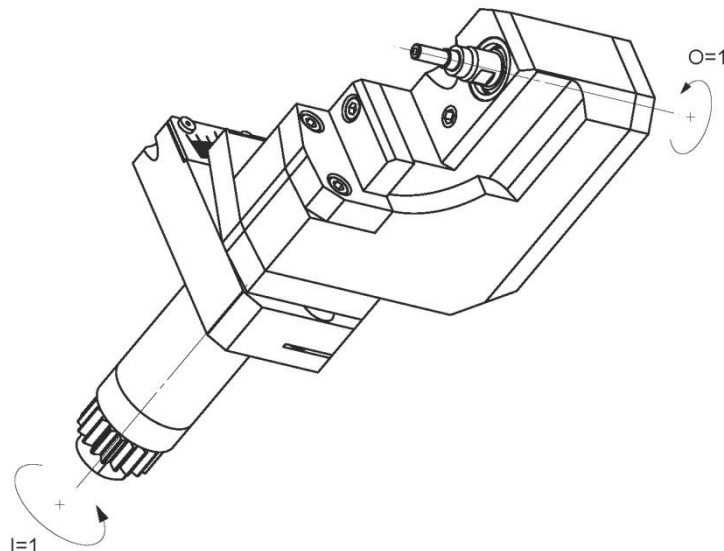

Machine: STAR MICRONICS

Type: SB-12/16/20R SR-20J

Location, N°: Gangtool / T33-34-35

Work on: Main spindle

Type of work:




n_{max} : - [rpm]

$i (n_i / n_o)$: 1 / 1

Attachement: Shaft Ø3.5/4.5mm

Without coolant

Infos: Interchangeable hobbing head (GSH-145, +15°/-3°) mounted on shank STAR2-PCR.

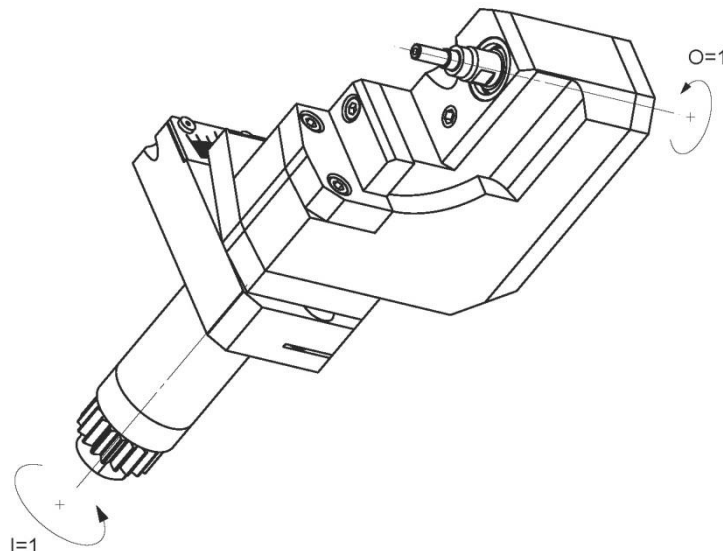SB-GSH-145

Machine: STAR MICRONICS

Typ: SB-12/16/20R SR-20J

Position, N°: Vertikalhalter / T33-34-35


Arbeit über: Hauptspindel

Arbeitstyp:

 $n_{\max}$: - [rpm] $i (n_i / n_o)$: 1 / 1Befestigung: Schaft $\varnothing 3.5/4.5\text{mm}$

Ohne Kühlmittel

Infos: Austauschbar Abwälzfräserhalter (GSH-145, $+15^\circ/-3^\circ$) auf Schaft STAR2-PCR fixiert.

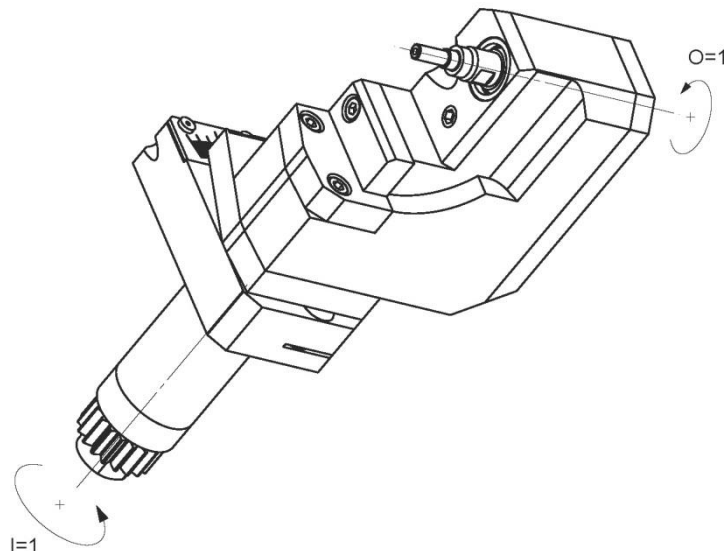SB-GSH-145

Macchina: STAR MICRONICS

Tipo: SB-12/16/20R SR-20J

Posizione, N°: Slitta lineare / T33-34-35

Lavoro al: Mandrino principale

Tipo di lavoro:

 $n_{\max}$: - [rpm] $i (n_i / n_o)$: 1 / 1

Ataccamento: Codolo Ø3.5/4.5mm

Senza refrigerante

Informazioni: Testa a tagliare intercambiabile (GSH-145, +15°/-3°) salita sulla coda STAR2-PCR.