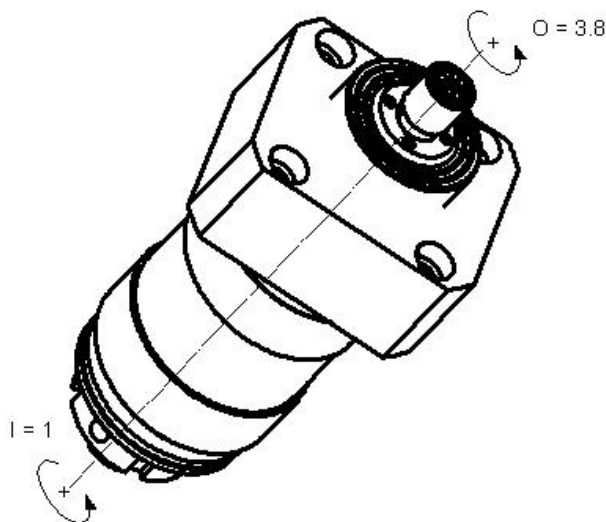


BO26-GSC-105-4x

Machine: Tsugami

Type: B0265 II, B0265B II, B0325 II, B0325B II, B0266 II, 0326 II

Emplacement, N°: Y671


Travail sur: Broche principale

Type de travail:  $n_{\max}$: 22'800 [rpm] $i (n_i / n_o)$: 1 / 3.8

Attachement: ER8

Sans refroidissement

Infos:

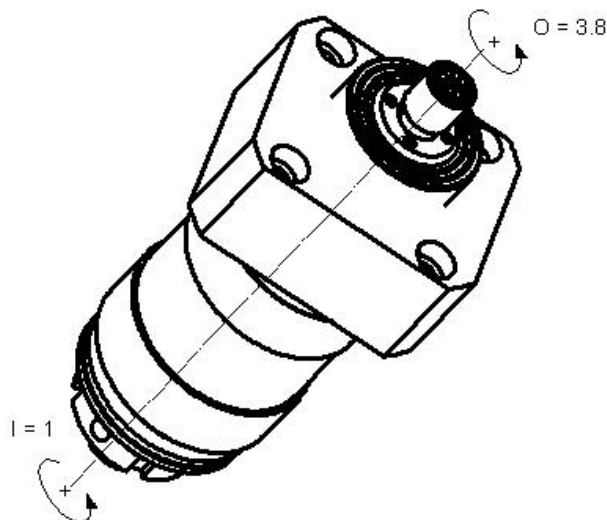BO26-GSC-105-4x

Machine: Tsugami

Type: B0265 II, B0265B II, B0325 II, B0325B II, B0266 II, 0326 II

Location, N°: Y671


Work on: Main spindle

Type of work:  $n_{\max}$: 22'800 [rpm] $i (n_i / n_o)$: 1 / 3.8

Attachement: ER 8

Without coolant

Infos:

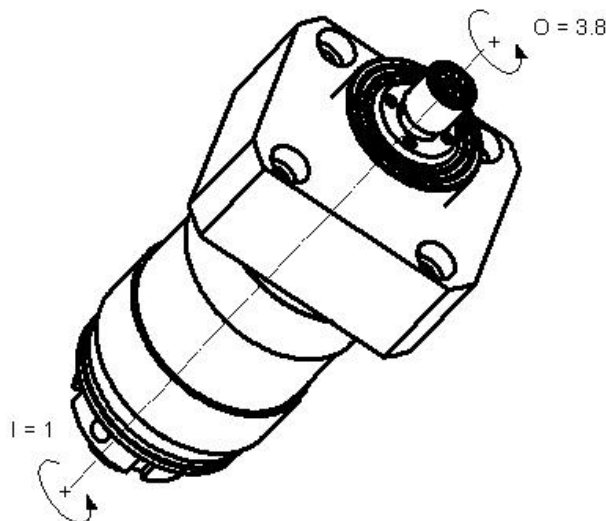BO26-GSC-105-4x

Machine: Tsugami

Typ: B0265 II, B0265B II, B0325 II, B0325B II, B0266 II, 0326 II

Position, N°: Y671

Arbeit über: Hauptspindel


Arbeitstyp:  $n_{\max}$: 22'800 [rpm] $i (n_i / n_o)$: 1 / 3.8

Befestigung: ER 8

Ohne Kühlmittel

Infos:

BO26-GSC-105-4x

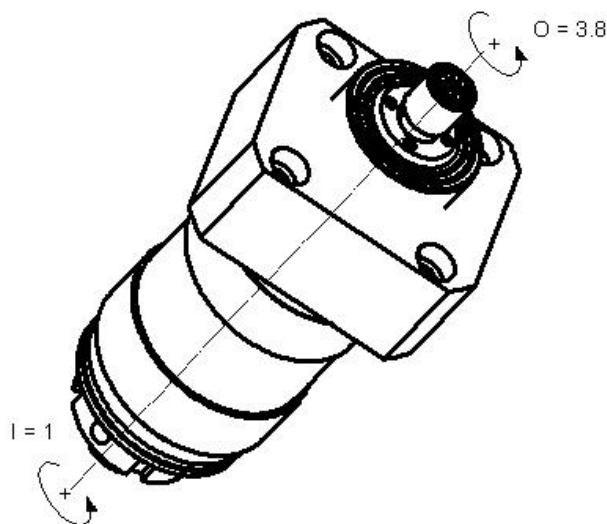

Macchina: Tsugami

Tipo: B0265 II, B0265B II, B0325 II, B0325B II, B0266 II, 0326 II

Posizione, N°: Y671

Lavoro al: Mandrino principale

Tipo di lavoro: 

n_{max} : 22'800 [rpm]

$i (n_i / n_o)$: 1 / 3.8

Ataccamento: ER 8

Senza refrigerante

Informazioni: