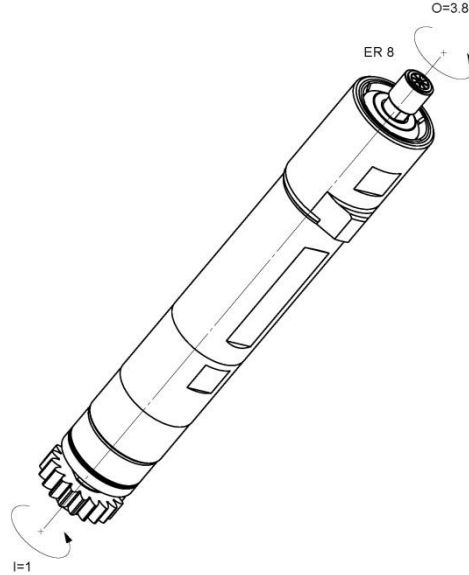

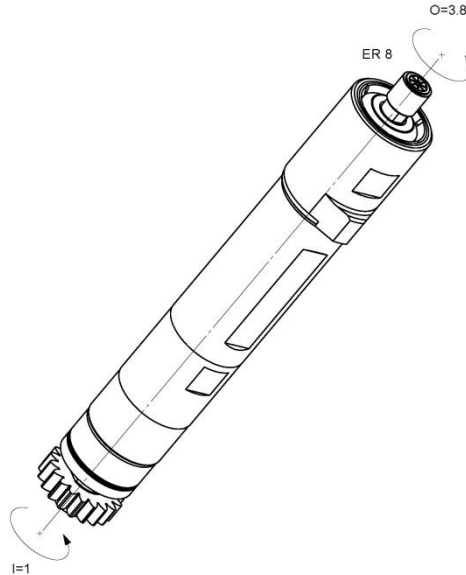

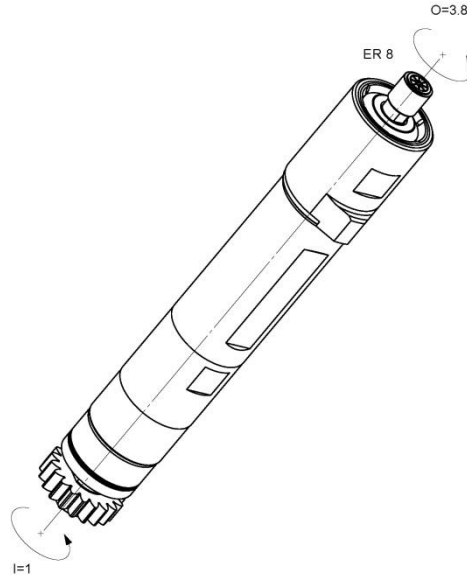


GSC-510-4X


Machine: CITIZEN Cincom
Type: L20 / M20 / M32
Emplacement, N°: Upper gang tool post
Travail sur: Broche principale
Type de travail: 
n_{max}: 22'800 [rpm]
i (n_i / n_o): 1 / 3.8
Attachement: ER8
Sans refroidissement
Infos:
Couple max : 0.2 Nm


GSC-510-4X

Machine: CITIZEN Cincom
Type: L20 / M20 / M32
Location, N°: Upper gang tool post
Work on: Main spindle
Type of work: 
n_{max}: 22'800 [rpm]
i (n_i / n_o): 1 / 3.8
Attachement: ER 8
Without coolant
Infos:
Torque max: 0.2 Nm

GSC-510-4X

Maschine: CITIZEN Cincom
Typ: L20 / M20 / M32
Position, N°: Upper gang tool post
Arbeit über: Hauptspindel
Arbeitstyp: 
 n_{max} : 22'800 [rpm]
 i (n_i / n_o): 1 / 3.8
Befestigung: ER 8
Ohne Kühlmittel
Infos:
Max. Drehmoment: 0.2 Nm

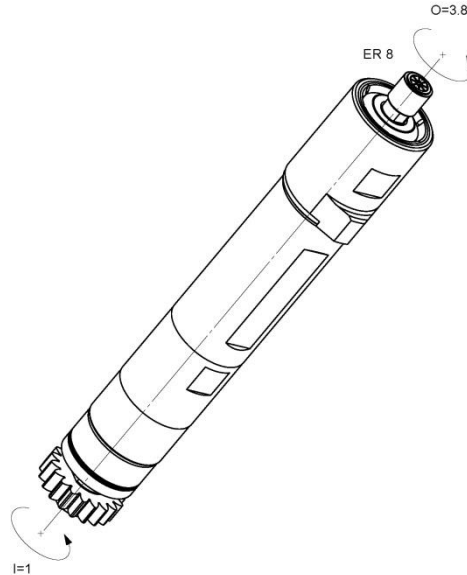GSC-510-4X

Macchina: CITIZEN Cincom
Tipo: L20 / M20 / M32
Posizione, N°: Upper gang tool post
Lavoro al: Mandrino principale
Tipo di lavoro: 
 n_{max} : 22'800 [rpm]
 i (n_i / n_o): 1 / 3.8
Ataccamento: ER 8
Senza refrigerante
Informazioni:
Coppia max: 0.2 Nm